



# Shut off Valve - Sub-plate mounting, Model : MSSL06-2.0



the right connection  
the right environment


Ref. No : H02651, Release March 2018 (Dimensions in mm)

## Technical Specifications

- Construction . . . . . Seat type.
- Mounting type . . . . . Sub-plate mounting type.
- Interface . . . . . ISO 5781 - AB - 03 - 4 - B.
- Mounting position . . . . . Optional
- Flow direction . . . . . From port `A' to port `B'.
- Operating pressure . . . . . 315 bar.
- Hydraulic medium . . . . . Mineral oil.
- Viscosity range . . . . . 10 cSt to 380 cSt.
- Fluid temperature range . . . . . -20 °C to +80 °C.
- Fluid cleanliness requirement . . . . . As per ISO 19/16 or better.
- Mass . . . . . 0.9 kg.
- Maximum flow handling capacity . . . . . Refer graph.

## Performance Curves

- Oil used : ISO VG 68,
- Viscosity : 68 cSt @ 40 °C
- Test conducted at : 50 °C.

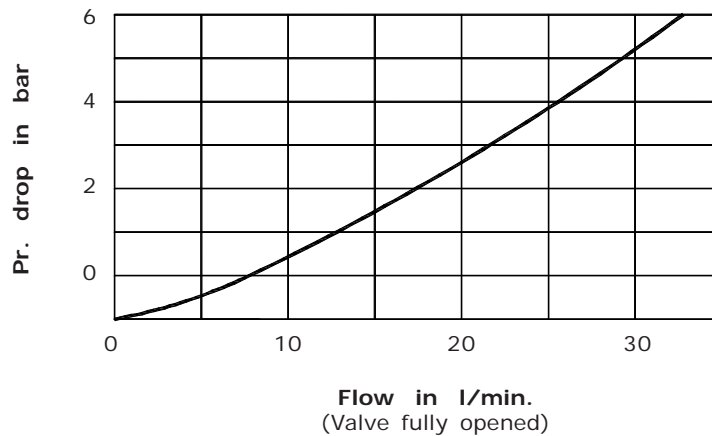

## Ordering Code

